



MPC TYPE "DSAHSS"



SIZE							
	clamp size	clamp size	Band	Band Thickness			Thightening
	minimum:	maximum:	width:	S1	S2	SCREW	Torque:
	d	D	B1+/-1	W1 W5	W1 W5	M	AD* in Nm
1	30	40	20	1	2	6	8
2	35	45	20	1	2	6	8
3	40	50	20	1	2	6	8
4	45	55	20	1	2	6	8
5	50	60	20	1	2	6	8
6	55	65	20	1	2	6	8
7	60	70	20	1	2	6	8
8	65	75	20	1	2	6	8
9	70	80	20	1	2	6	8
10	75	85	20	1	2	6	8
11	80	90	20	1	2	6	8
12	85	95	20	1	2	6	8
13	90	100	20	1	2	6	8
14	95	105	20	1	2	6	8
15	100	110	20	1	2	6	8
16	105	115	20	1	2	6	8
17	110	120	20	1	2	6	8
18	115	125	20	1	2	6	8
19	120	130	20	1	2	6	8
20	125	135	20	1	2	6	8
21	130	140	20	1	2	6	8
22	135	145	20	1	2	6	8
23	140	150	20	1	2	6	8
24	145	155	20	1	2	6	8
25	150	160	20	1	2	6	8
26	155	165	20	1	2	6	8
27	160	170	20	1	2	6	8
28	165	175	20	1	2	6	8
29	170	180	20	1	2	6	8
30	180	190	20	1	2	6	8
31	190	200	20	1	2	6	8
32	200	210	20	1	2	6	8
33	210	220	20	1	2	6	8
34	220	230	20	1	2	6	8
35	230	240	20	1	2	6	8
36	240	250	20	1	2	6	8

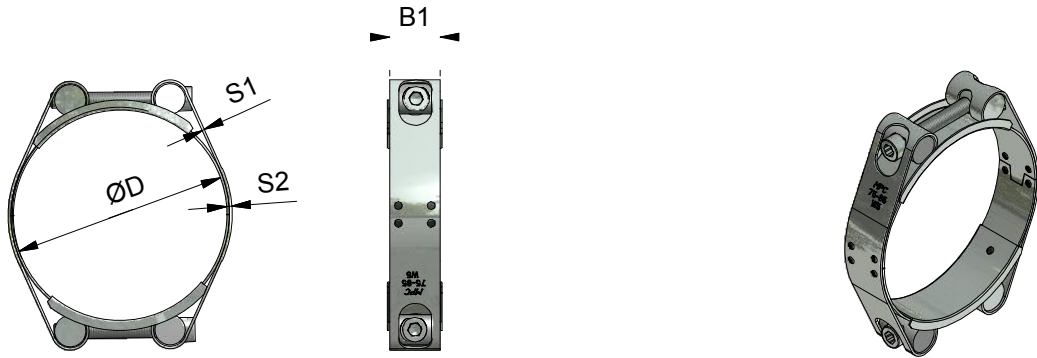

Third angle projection:



Part number:

DSA HSS

Description:

MPC Industries Double Super
Clamp Hex Same Side

Revision:

Format:

A4

Drawn by: Gyula

Creation date: 04-Jul-13

Scale 1:1

Units: mm